

Flexo Tailor

robot | cutting machine



OROX S.r.l

- Via E. Fermi, 48
24035 Curno (BG) Italy
- Ph. +39 035.4942582
Ph. +39 035.527512
- Fax +39 035.5095566

CUSTOMER CARE

- assistenza@orox.it
- Tel. +39 035.4942582

www.orox.it | info@orox.it



Scan me



COD.1017

Flexo Tailor

robot | cutting machine
CAD/CAM systems

Static cutter for medium production
and made-to-measure



Flexo Tailor

• ROBOT • MACHINES • CAD/CAM SYSTEMS

Static cutter for medium production and made-to-measure


T300
CUT FABRICS FROM SINGLE PLY
UP TO 3CM OF COMPRESSED LAYER

T600
CUT FABRICS FROM SINGLE PLY
UP TO 6CM OF COMPRESSED LAYER

T800
CUT FABRICS FROM SINGLE PLY
UP TO 8CM OF COMPRESSED LAYER

- Oscillating knife with «FLEXO» device
- Operative control by means of computer
- Cutting simulation of a single shape for error prevention
- Auto-diagnosis system to identify and advice eventual errors
- «EVAS»: eletronic Vacuum sensor system to optimize the suction for firmly holding the fabric with correct pressure and reducing eletric consumption
- Air exhaust with filter and silencer
- Knife control with variable speed

OPERATIVE CONTROL
by means
of computer ■

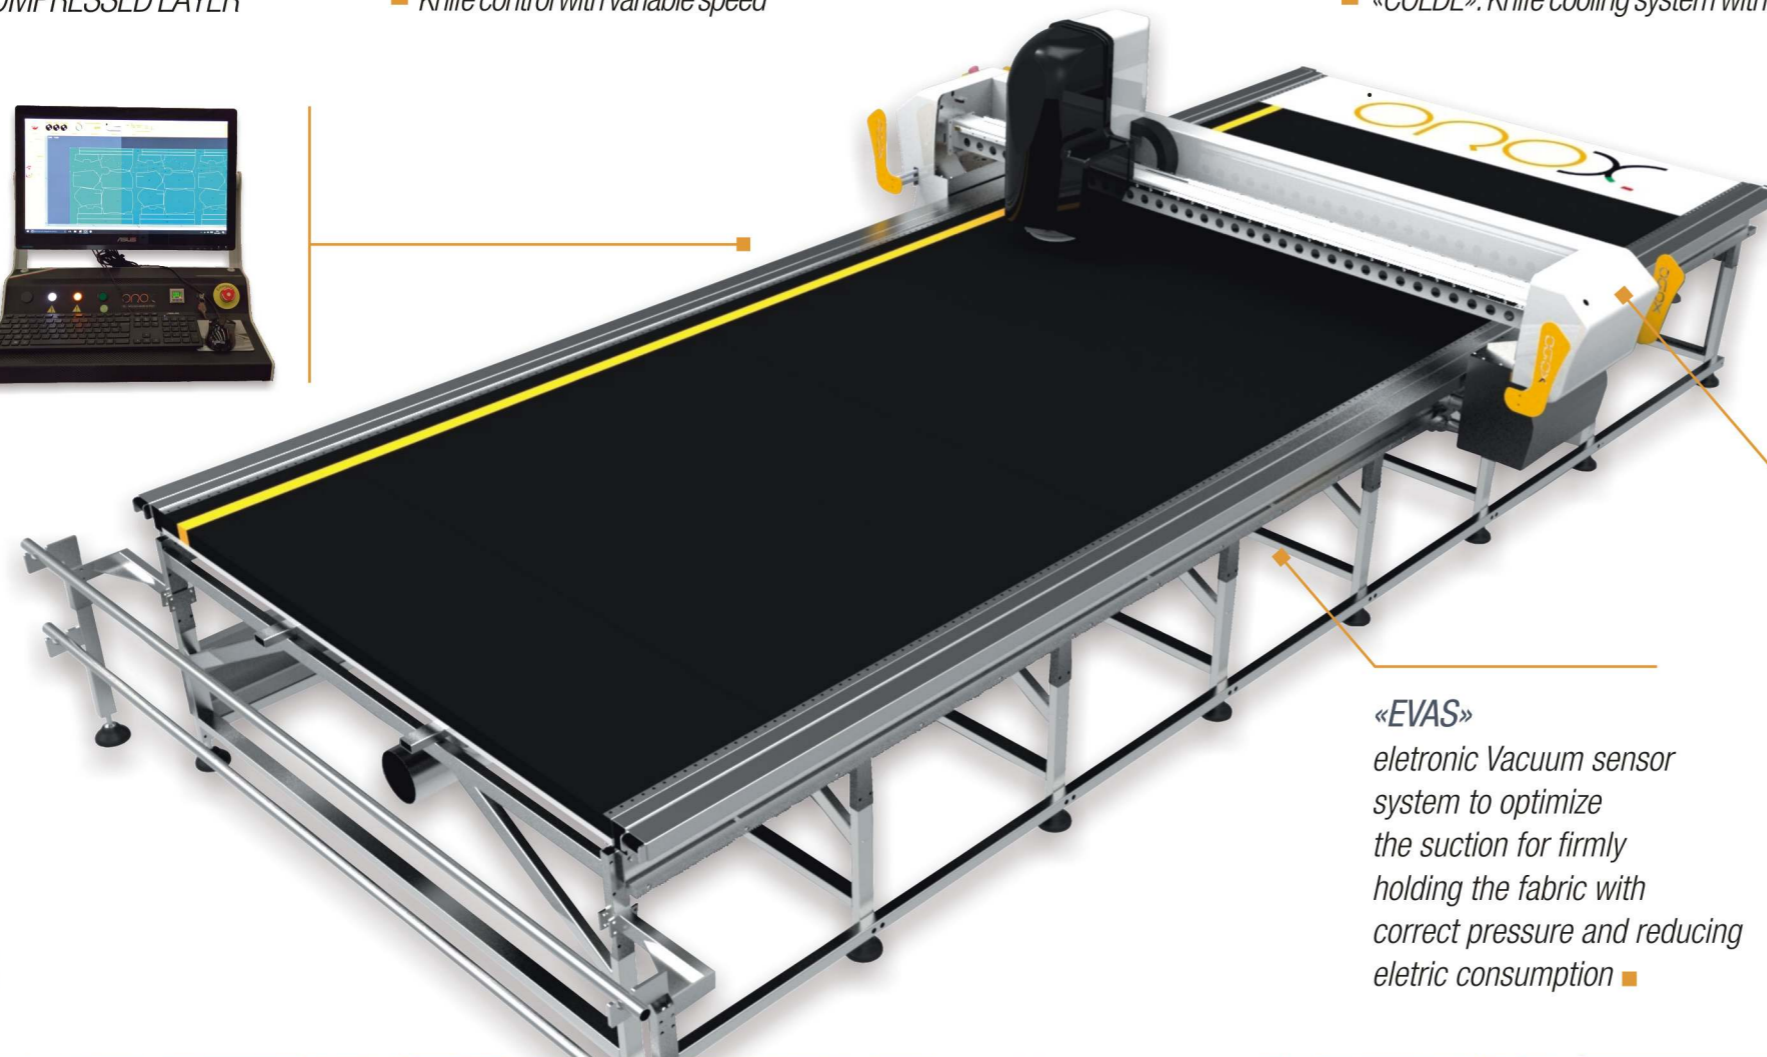

Features

High technology on cutting fabrics

- Cutting with variable knife speed to reduce and eliminate the sticking of resin fabrics
- Multifunctions «touch-screen» on board with user friendly interface
- Drill holder device with interchangeable drill bits of different size
- «QUAD MULTIAGHI»©: Flexible to facilitate the penetration of the knife and concentrate the vacuum on cutting zone
- «HD»: Hot Drill with adjustable temperature
- «COLDE»: Knife cooling system with frozen air

«EVAS»
eletronic Vacuum sensor
system to optimize
the suction for firmly
holding the fabric with
correct pressure and reducing
eletric consumption ■



TOUCH SCREEN
The multifunction keypad.
Operator panel with
immediate and intuitive
commands which save
time and greatly improve
the working efficiency ■



Optional

PD «Punching Device»
supplementary drill for die
hole diam max 25 mm

FLESE Sensor for knife
deflection control
on real time

«EAGLE» system

